










# C-4001

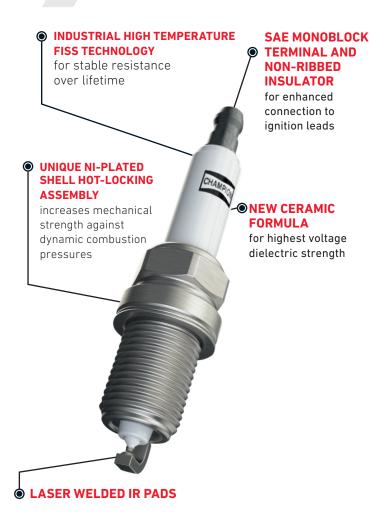

# Electrode Gap, Nom.

0,35mm 0,4mm 0,45mm

### **Electrode Resistance**

2 kΩ 3 - 12 kΩ 16 kΩ


Federal-Mogul Ignition GmbH Bürgermeister-Schmidt-Str. 17 51399 Burscheid, Germany https://ignition.tenneco.com

© 2020 Tenneco Inc. All rights reserved. All trademarks are owned by Tenneco Inc. or one of its subsidiaries, in one or more countries. C-4001 Rev 11/2021

## **Basic Technical Data**

Properties	C-4001
Suppressor Resistor	3 - 12 kΩ
Hex	16mm
Thread	M14x1,25
Thread length	19mm
Precious metals	Iridium/Iridium
Electrode gap	nom. 0.4mm
Tightening Torque (Cast iron)	30-40Nm

#### **Dimensions**

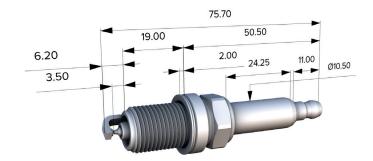

## **Target Applications**

• Commercial Truck Off-Highway (Trucks, Buses, Construcion machines)

## **Engines**

• Scania, Daimler, MAN, Iveco

#### **Cross References**

BOSCH WR3KI332